

AEGIS - SC4 OUTDOOR SCREEN


Ultra-clear display, rugged outdoor reliability.

Product features:


- Crisp, seamless P4 visuals for clear outdoor viewing
- Robust steel cabinet, fully weatherproof (IP65)
- High reliability with energy-efficient performance
- Convenient front and rear maintenance

Applications: (Outdoor Settings)


- Retail shops & chain stores
- Restaurants & cafes
- Airports & train stations
- Museums & creative towers
- Public outdoor spaces

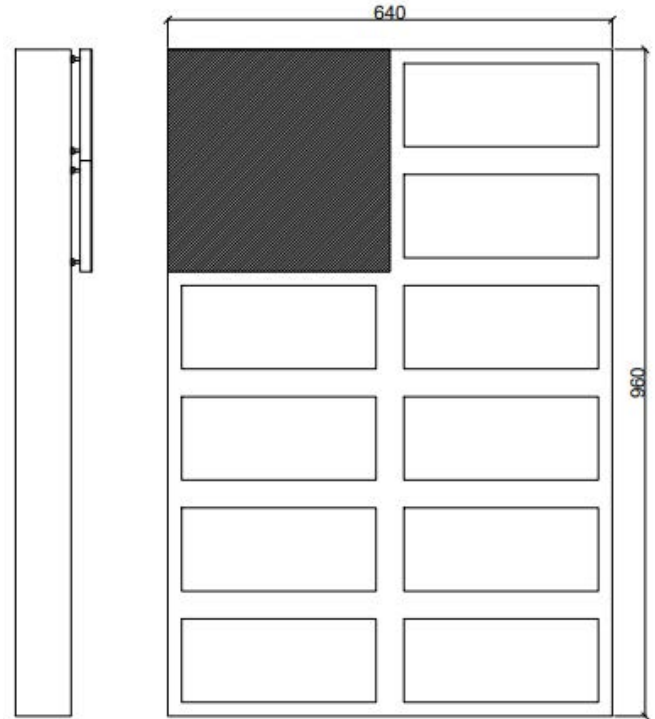

Cabinet Picture

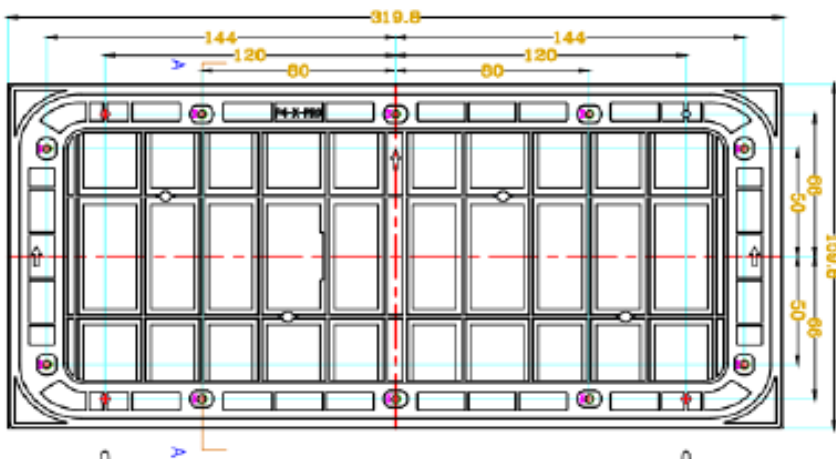

Module Picture

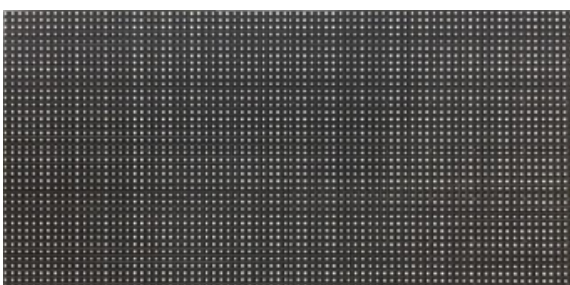

Note: Drawings are for reference only.



BUTTERFLY ELECTRONICS APPLIANCES ASSEMBLY LLC

بترفلاي لتجميع الأجهزة الإلكترونية ش.ذ.م.م

WWW.BUTTERFLYLEDD.COM
800-88877 | +971 4 3458713
SALES@BUTTERFLYLEDD.COM



Parameters of P4 Outdoor Screen

Pixel Pitch	4 mm
LED Type	SMD1921
Module Resolution (W×H)	80X40=3200 Pixels
Pixel density (pixels/sq.m.)	62500 dot/m ²
Cabinet Size (W×H×D)	640mm x 960mm x 100mm
One Cabinet Weight (with accessories)	11 kg
HUB	HUB75
Single-dot Brightness Calibration	Support
Brightness	6000 ~ 6500 cd/m ²
Color Temperature	6500K (1000K~9500K Adjustable)
Beam Angle (Hor/Ver°)	140°/Looking up 70°, Looking down 40°
Brightness/Color Uniformity	≥98%
Contrast Ratio	5000:1
Input Power <Max>	600W / One Cabinet
Input Power <Typical>	500W / One Cabinet
Power Supply Input Voltage	AC90~132V/ AC186~264V, Frequency 47-63 (Hz)
Frame Changing Frequency	60Hz
Refresh Rate	3840Hz
Processing Depth	12 - 14 BIT
Video Support	2K, 4k, HD, UHD
Life Span (hrs)	100000 HRS
Working Temp/Humidity (°C/RH)	-20°C~50°C / 10%~65%RH (No Condensation)
Storage Temp/Humidity (°C/RH) Certification	-10°C~30°C / 10%~60%RH (No Condensation)