

VISION-1.8COB64 Indoor Screen


Chip-On-Board Indoor Screen






Product Features

- ❖ Cabinet Size: 640 × 480 mm
- ❖ Resolution per Cabinet: 344 × 258 pixels
- ❖ Technology: COB (Chip-On-Board)
- ❖ LED Type: Integrated COB packaging
- ❖ Brightness: 600 – 900 nits
- ❖ Refresh Rate: ≥3840Hz
- ❖ Cabinet Material: Die-cast Aluminum
- ❖ Protection Level: IP54 front – waterproof, Dustproof, anti-collision

Cabinet Thickness: 44.9mm Cabinet Weight: 3kg

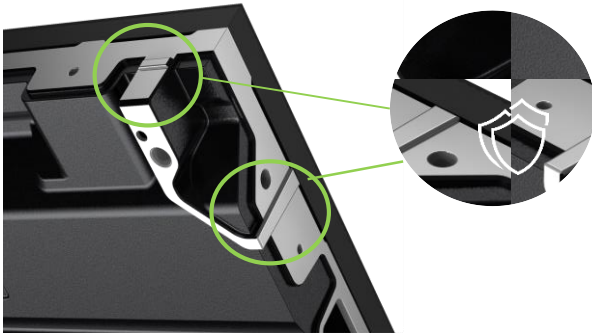

Thickness: 44.9mm Weight: 3kg

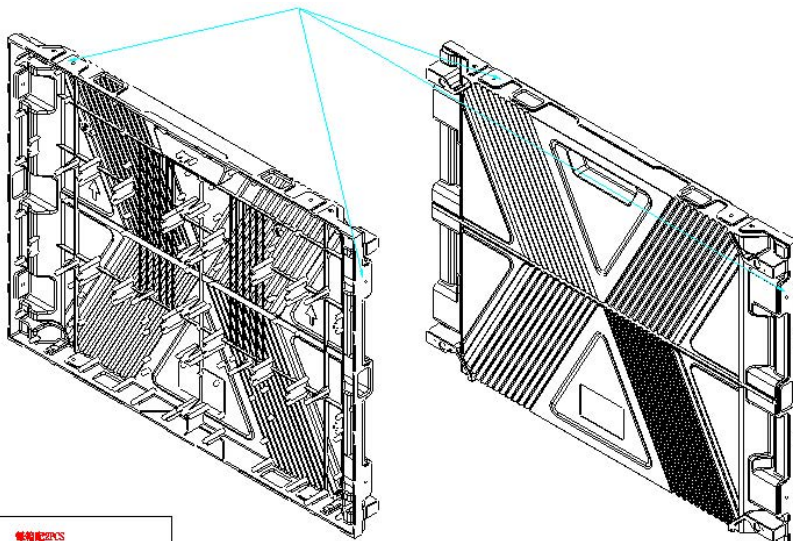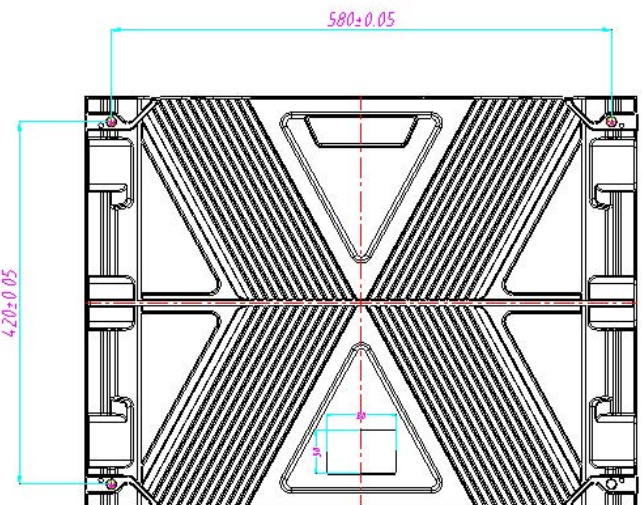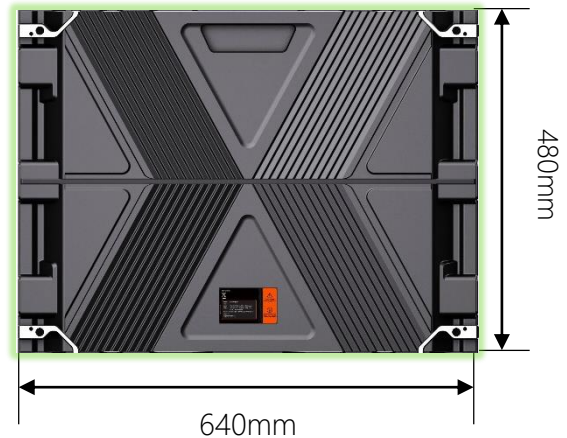



BUTTERFLY ELECTRONICS APPLIANCES ASSEMBLY LLC

بترفلاي لتجميع الأجهزة الإلكترونية ش.ذ.م.م

WWW.BUTTERFLYLEDD.COM

800-88877 | +971 4 3458713

SALES@BUTTERFLYLEDD.COM



Parameters of Vision 1.8 Indoor Screen

Module Size	320x160mm
Panel Weight	0.5kg/panel
Pixel Density	288,906pixels/m ²
Pixels Per Panel	172 x 86pixels
Cabinet Size	640mm x 480mm x 60mm
Brightness	800 -900 nits
Ingress Protection	Front: IP54
Environment	Indoor
Calibration	Support brightness and chroma
Brightness Control	Manual/Automatic
Color Temperature	1,000K ~ 9,500K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	10000:1
Input Power <Max>	200W / six modules
Input Power <Typical>	150W / six modules
Input Voltage	AC90~132V/ AC186~264V
Processing Depth	13bit
Refresh Rate	3840Hz
Video Frame Rate	50&60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~45°C / 10%-50%RH
Storage Temperature/Humidity	-20°C~55°C / 10%-60%RH
Data interfaces	HUB320